

New Generation

Vcenter-NH5000

Horizontal machining center

- Travels (X/Y/Z): 800 / 700 / 800 mm
- Rapid feeds: 48 / 48 / 48 m/min
- BBT-40 / 12000 rpm spindle / 18.5 KW
- Pallet loading 500 kg
- Roller type linear motion guideways
- Grease lubrication



Victor Taichung – an established ISO 9001, 14001 & 45001 company







Vcenter-NH5000

New Generation HMC

- ◆ Y-axis travel 700 mm and high rapid feeds 48 m/min with roller type linear motion guideways
- ◆ 12000 rpm BBT-40 spindle with high power output 18.5 kW
- ◆ T-shape structure with slant style column design facilitates quick tool & pallet exchange and high cutting rigidity
- ◆ Symmetric base with deep groove in the center for efficient chip removal

X/Y/Z AXES


- Maximum part dimension: $\varnothing 800 \times 1000$ mm
- Travels: 800/700/800 mm
- Rapid feeds: 48/48/48 m/min
- Ballscrew diameter: 45/45/45 mm
- Roller type LM guideways 55/45/45 mm
- Grease lubrication

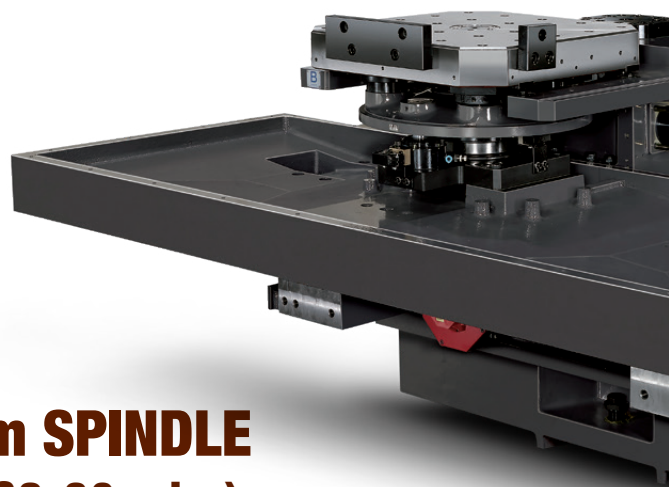

12000 rpm SPINDLE

18.5 KW (S2-30 min.)

- Direct drive 12000 rpm BigPlus® BT-40 spindle
- Dual low/high winding with high power output 18.5 KW 118 Nm (S2 30 min or S3-60%)
- Air curtain included with oil/air lubrication

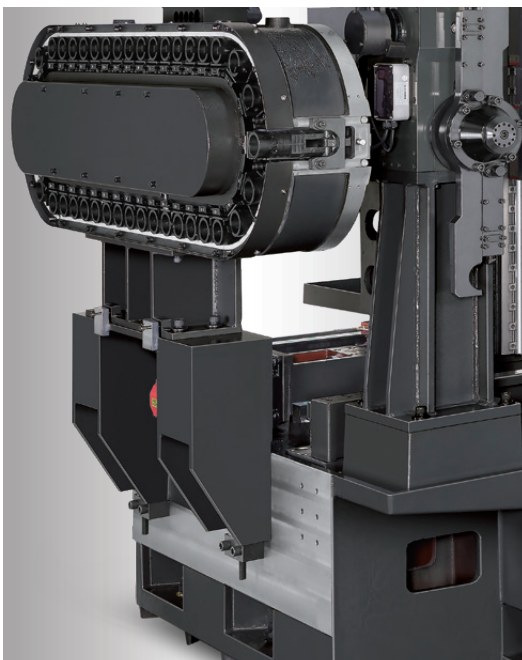


ATC (Auto Tool Changer)

- 40 tools (opt. 60, 90)
- Tool exchange time:
3.0 sec. (T-T, 7 kg tool)
6.7 sec. (C-C, 7 kg tool)





Certificated Casting

GB300

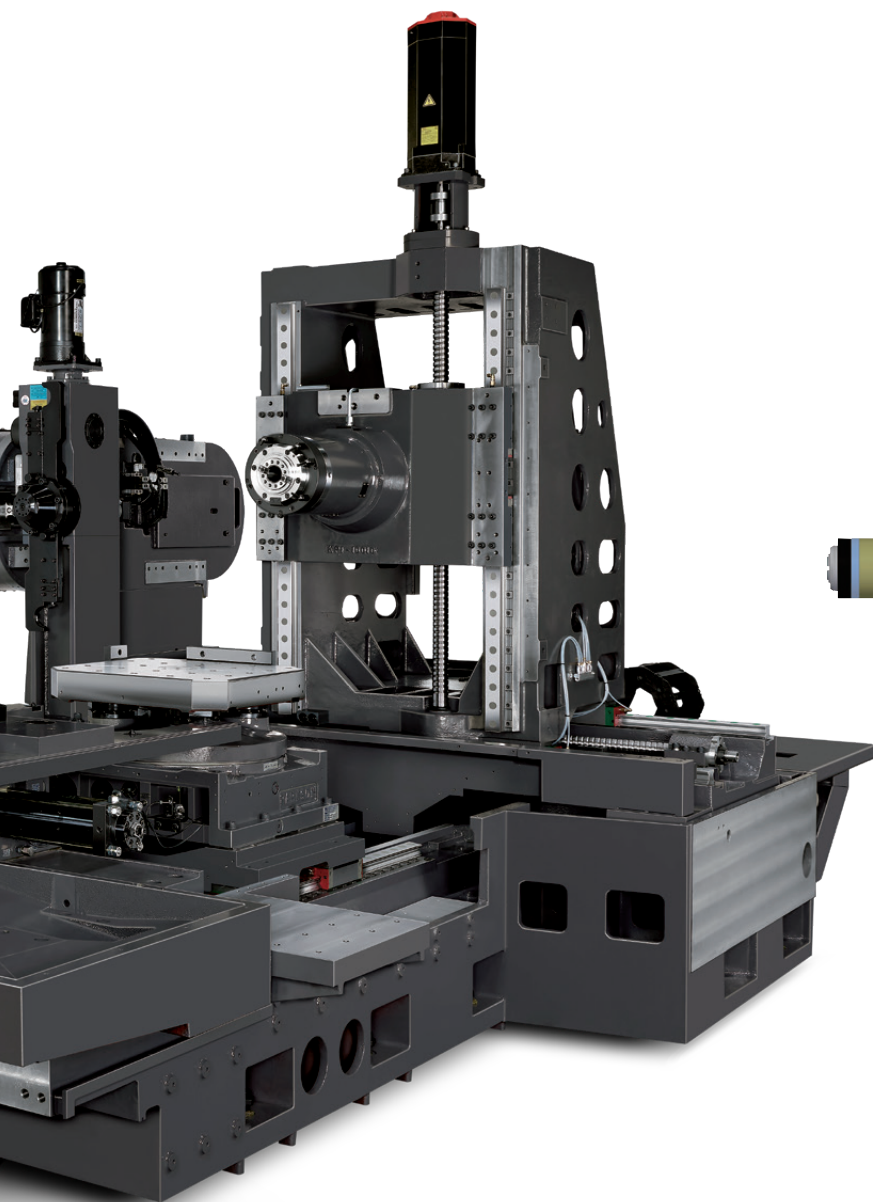

Cutting force

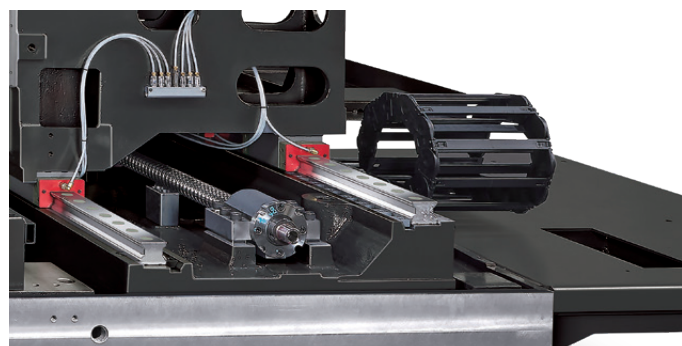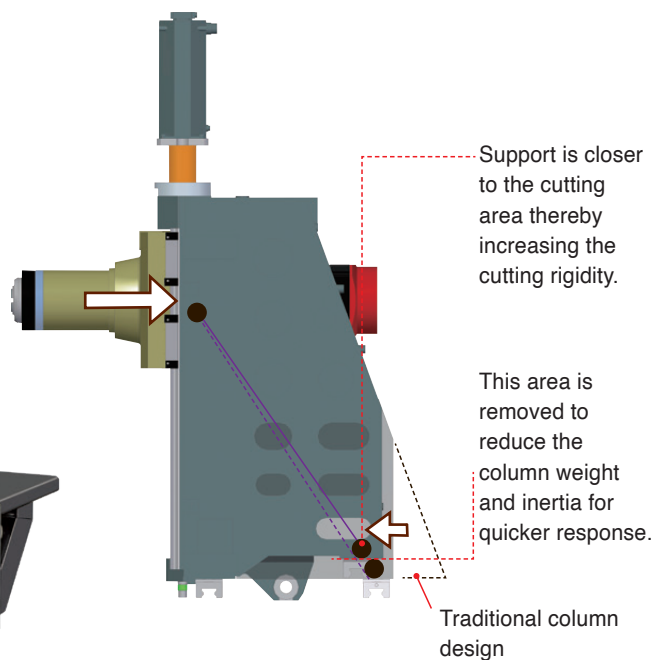

B AXIS

- 1 degree indexing (with coupling), opt. 0.001 degree (CNC pallet)
- 4 grounded cones shaped with taper pins and bushes for high accuracy and repeatability
- Air blow thru tapered cones.
- Hydraulic ports thru B-axis pallet available (opt.)



APC (Auto Pallet Changer)

- Pallet dimension 500 x 500 mm
- Hydraulic drive (opt. servo driven)
- Pallet exchange time : 6.5 sec (P-P), 11 sec (C-C)


Standard / Optional Accessories

New Fanuc Oi-MF Plus Control


- ◆ 10.4" screen + AICC-2 (200 blocks) + Manual Guide I (MGI) + 2GB CF card
- ◆ Victor's GUI (VSS macros)
- ◆ ECO design for tool calibration



15" screen (opt.)



Alarm display with diagnosis



Tool management



Tool breakage detection (opt.)



Renishaw GUI (opt.)



Lube Hybrid Lubrication



Spindle oil cooler



Chip conveyor



Table shower




Optional Accessories

CTS (Coolants Thru Spindle, opt.)




Tool length measurement (opt.)

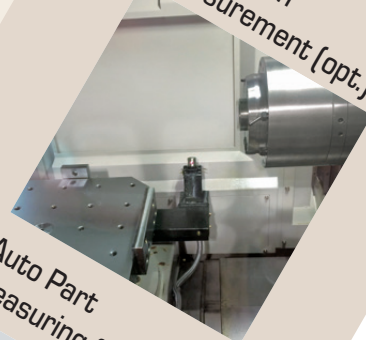

Auto Part measuring (opt.)



Linear scales (opt.)

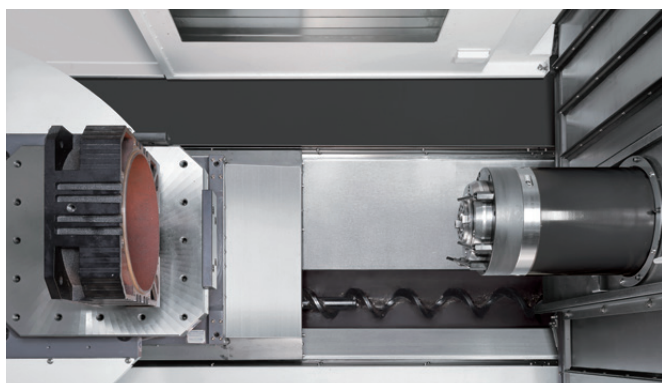

One piece Z-axis cover + Screw chip remover



Enclosed rear guarding

Victor Taichung's FANUC Oi-MF Plus (10.4") Control SPECIFICATION

Standard

ITEM	SPECIFICATION	DESCRIPTION
Operation & Program Input:		
1.	Input / Output interface	RS-232, PCMCIA Card, USB
2.	Tool Offset Pairs	± 6-digit, 400
3.	Program Number	O4-Digit
4.	Sequence Number	N5-Digit
5.	M Code Function	M3 digit
6.	S Code Function	S5 digit
7.	T Code Function	T2 digit
8.	Program Display	Program name 31 characters
9.	Positioning	G00
10.	Linear Interpolation	G01
11.	Circular Interpolation	G02, G03
12.	Helical interpolation	Std.
13.	Skip Function	G31
14.	Reference Position Return	G28, G30
15.	Absolute / Incremental Programming	G90/G91
16.	Plane Selection	G17, G18, G19
17.	Polar coordinate Command	G16.
18.	Workpiece Coordinate System	G52, G53, G54~G59
19.	Addition of Workpiece Coordinate System Pair	48 Pairs
20.	Optional Chamfering/Corner R	Std.
21.	Sub Program Call	4 folds nested
22.	Custom macro B	Std.
23.	Addition of Custom Macro Common Variables	#100~#199, #500~#999
24.	Canned cycle For Drilling	G73/G74/G76, G80-G89
25.	Small hole peck drilling cycle	G83
26.	Program Stop / Program End	M00 / M01 / M02 / M30
27.	Scaling	G51
28.	Rigid tapping	M29
29.	Coordinate System Rotation	G68
30.	Programmable mirror image	G50.1
31.	Manual Guide I (MGI) conversational programming	Std.
32.	Fine Surface Machining	Std.
33.	Smooth tolerance control+	Std.

Controlled Axes:

1.	Controlled Axes	3 Axes (X, Y, Z)
2.	Simultaneous Controlled Axes	4 Axes
3.	Least Input Increment	0.001 mm
4.	Least command increment	0.0001 mm
5.	HRV Control	HRV3+
6.	Unexpected disturbance torque detection (AIR-BAG)	Std.
7.	Backlash compensation	Std.
8.	Stored pitch error compensation	Std.

Feed:

1.	Rapid Traverse Override	F0, 25%, 50%, 100%
2.	Feed Per Minute	G94 (mm/min)
3.	Feed rate Override	0~200%
4.	Spindle Override	50~200%
5.	Manual Handle Feed Rate	X1, X10, X100
6.	AI contour control (AICC, G05.1) (in total)	200 blocks



Edit Operation:

1.	Part Program Storage Length (in total)	5120m
2.	Part Program Editing / Protect	Std.
3.	Memory Card Editing (Max. 63 programs.)	Std.



OPTIONS

ITEM	SPECIFICATION	DESCRIPTION
With hardware included:		OI-M
1.	Data server (with PCB and CF card 1GB)	☐
2.	Ethernet/IP (to be linked to robot)	☐
3.	PROFIBUS-DP (to be linked to robot)	☐
4.	CC-Link (to be linked to robot)	☐
5.	Fast Ethernet (required for SCADA Web with additional RJ45 port)	☐
6.	15" LCD with Panel iH (iHMI) and touch screen	☐
7.	AI contour control 400 blocks	☐
Edit Operation:		
8.	Tool load monitoring (with Victor own PLC)	☐
9.	Cylindrical interpolation (G7.1) (used on 4th axis)	☐
10.	Addition of work-piece coordinate systems 300 sets	☐
11.	Tilted working plane indexing command	☐
12.	Memory card program entry count extension (Max. 1000)	☐




Spindle Output

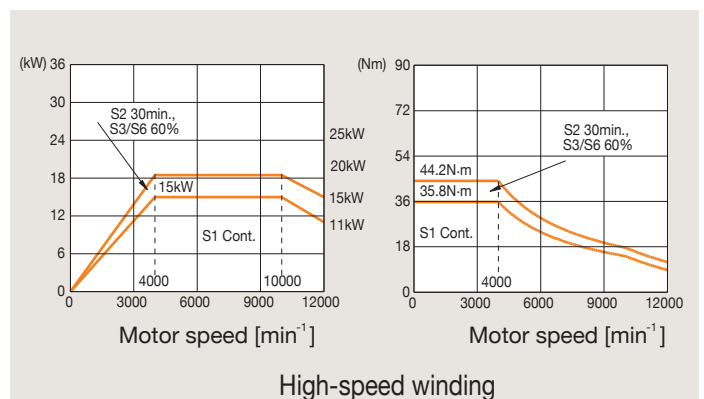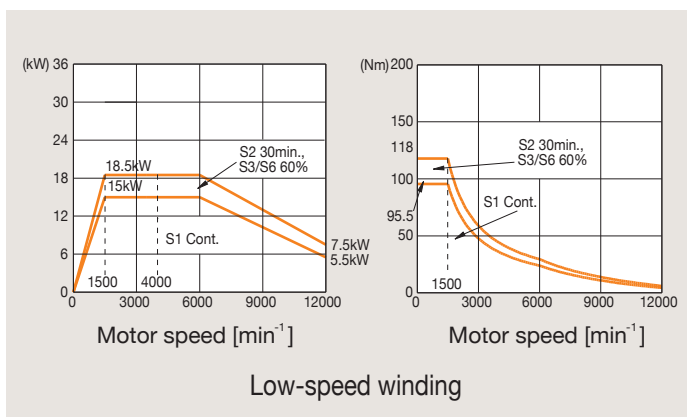





Machining Range

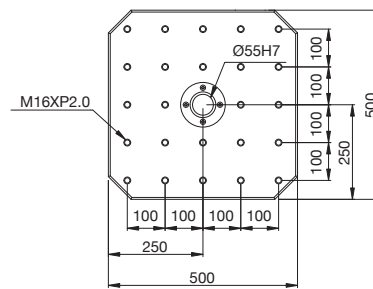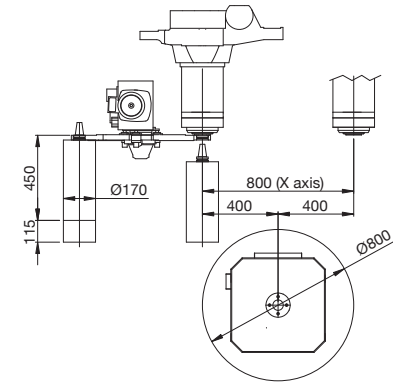

Hydraulic interface (4 ports, opt.)

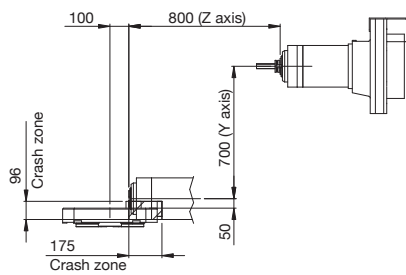

Machine Layout

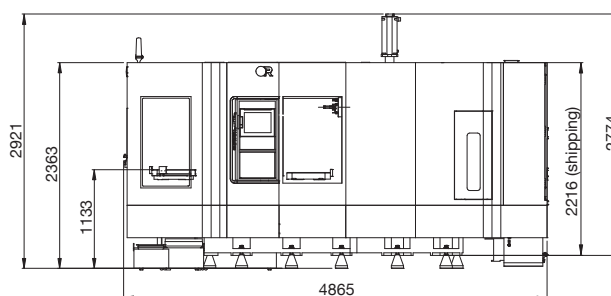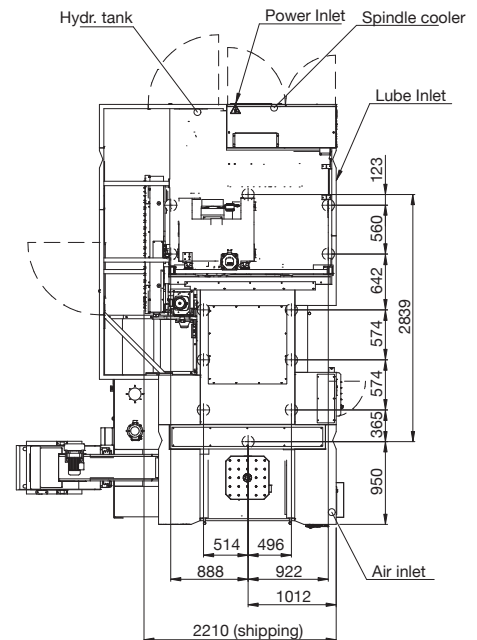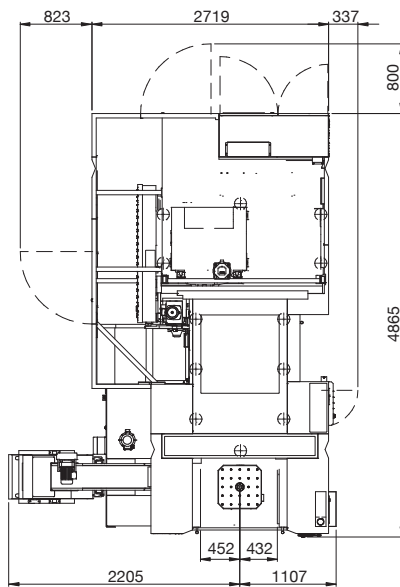



Unit: mm

Machine Specification

Item	Unit	Vcenter-NH5000
Capacity	X axis travel	mm 800
	Y axis travel	mm 700
	Z axis travel	mm 800
Distance	Spindle center to column	mm 100-900
	Spindle nose to table surface	mm 50-750
	Max. part dimension (W x L x H)	mm Ø800 x 1000
Working Table	Table work area	mm 500 x 500
	Max. table (pallet) loading	kg 500
	Surface configuration	M16 x P2.0
	Min. angle of rotation	deg. 1 (opt. 0.001 for CNC table)
	Pallet exchange time	sec 6.5 (P-P), 11 (C-C)
	Pallet exchange type	Rotary
	Time to index 90°	sec 3 (opt. 1.6 for CNC table)
	Time to index 180°	sec 5 (opt. 3 for CNC table)
Spindle	Spindle taper	BBT-40
	Spindle motor- cont/30min	kW 15 / 18.5
	Spindle speed	rpm 12000 (opt. 15000)
	Spindle bearing diameter	mm 70
Axis feed	Rapid feed rate - X/Y/Z	m/min 48 / 48 / 48
	Axis feed motor - X/Y/Z	kW 4 / 6 / 4
	Cutting feed rate	m/min 20
	B axis feed motor	kW 2.5
	X/Y/Z ball screw (dia. x pitch)	mm Ø45 x 16
	Linear guideway width	mm 55 / 45 / 45
ATC & Tools	Tool magazine capacity	40 (opt. 60, 90)
	Tool selection	Random
	Max. tool dia. (without Adjacent tool)	mm 85 (170)
	Max tool length	mm 450
	Max. tool weight	kg 7
	Tool exchanging Time	sec 3 (T-T), 6.7 (C-C)
Machine	Pull stud angle	deg. 15° (JIS 40P)
	Standard CNC controller	0i-MF Plus (10.4")
	Power requirement	KVA 40 (50 with CTS)
	Air pressure requirement	kg/cm² 5.5 ~ 6.5
	Coolant tank	L. 500
	Chip disposal	Front and left
	Machine height	mm 2921
	Floor space requirement (with chip conveyor)	mm 3312 x 4865
	Machine weight	kg 13000

* Specifications are subject to change without notice for design improvement.

** Available with CE / UKCA / TS / GB certificates.

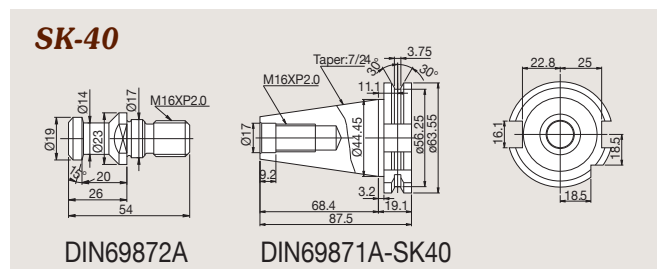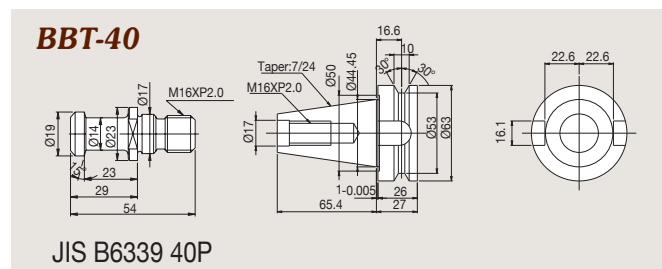

THE VICTOR-TAICHUNG COMPANIES

TAIWAN

http://www.victortaichung.com
E-mail: info@mail.or.com.tw

- Victor Taichung Machinery Works Co., Ltd.
No. 1, Jingke Central 2nd Rd.,
Nantun Dist., Taichung 40852,
TAIWAN, R.O.C.
TEL : 886-4-23592101
FAX : 886-4-23593389

FRANCE

- Victor France
TEL : 33-1-64772000
FAX : 33-1-64772063

GERMANY

- Victor GmbH
TEL : 49-2261-478434
FAX : 49-2261-478327

SOUTH AFRICA

- Victor Fortune (PTY) Ltd.
TEL : 27-11-3923800
FAX : 27-11-3923899

MALAYSIA

- Victor Machinery (M) SDN. BHD.
TEL : 60-3-56337180
FAX : 60-3-56337191

THAILAND

- Victor CNC (Thailand) Co., Ltd.
TEL : 66-2-9263735
FAX : 66-2-9032373

INDONESIA

- PT. Victor Machinery Indonesia
TEL : +62-21-88958504
FAX : +62-21-88958513

USA

- Fortune International Inc.
TEL : 1-732-2140700
FAX : 1-732-2140701

CHINA

- Victor Taichung Machinery (Shanghai)
TEL : 86-21-59768018
FAX : 86-21-59768009



HTL

VTL

VMC

HMC

XMT

PIM

Standard Accessories:

- 1° indexing table
- Spindle oil cooler
- Fully enclosed splash guard
- Manual pulse generator (remote type)
- Hand tools and tool box
- Scroll type chip remover
- Built-in work lamp
- Programming end light
- Leveling blocks
- Automatic pallet changer
- Spindle load meter
- Rigid tapping
- Table shower system
- Chip conveyer with cart
- Handy air gun
- Handy coolant gun
- Fanuc e-book (CD)

Optional Accessories:

- Air conditioner for electrical cabinet
- CNC table with 0.001° continuous indexing
- Coolant Through Spindle (CTS)
- 60, 90 tool magazine
- 15000 rpm spindle
- Hydraulic interface on pallet
- T-slot pallet
- Tool length measurement
- Workpiece measurement
- Linear encoder feedback
- Multi-face table (Tombstone fixture)