

Art of **P**recision & **P**erformance

Vcenter-P76 (APC) P106 / P136

Vertical machining center

- **Rapid feeds 48/48/32 m/min (Vc-P76/P106)**
- **12000rpm spindle output 18.5 KW(s3)**
- **BBT-40 / 30 tools**
- **Roller guideways**
- **Bottom guarding flush (Vc-P106/P136)**
- **Screw chip removers**



Victor Taichung – an established ISO 9001, 14001 & 45001 company



Vcenter-P series High Performance VMC

- X-travel 760/1060/1360 mm for Vc-P76/P106/P136
- High rapid feed 48 m/min (32 m/min for P136)
- High speed 12000rpm spindle
- Electrical counterbalance

ATC

- 2.2 (6.0) sec. (P76)
- 2.3 (6.3) sec. (P106)
- 2.3 (7.7) sec. (P136)
- T-T (chip-chip)

30
Tools

Magazine

Feeds & Travels

48/48/32 (P76/P106)
32/32/32 (P136)

X/Y/Z (m/min)

760 / 500 / 510 (P76)
1060 / 600 / 560 (P106)
1360 / 700 / 700 (P136)

X/Y/Z (mm)


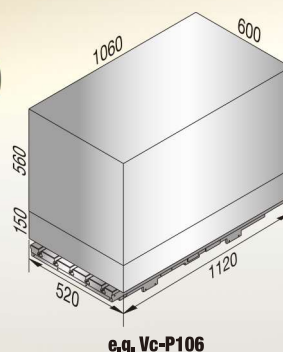


Table & Guideways


- 500 kg (P76)
- 600 kg (P106)
- 1000 kg (P136)



Roller guides X/Y/Z (mm)

- 30 / 35 / 45 (P76)**
- 35 / 45 / 45 (P106)**
- 45 / 35 (4 off) / 45 (P136)**

- 840 x 500 mm (P76)**
- 1120 x 520 mm (P106)**
- 1400 x 700 mm (P136)**

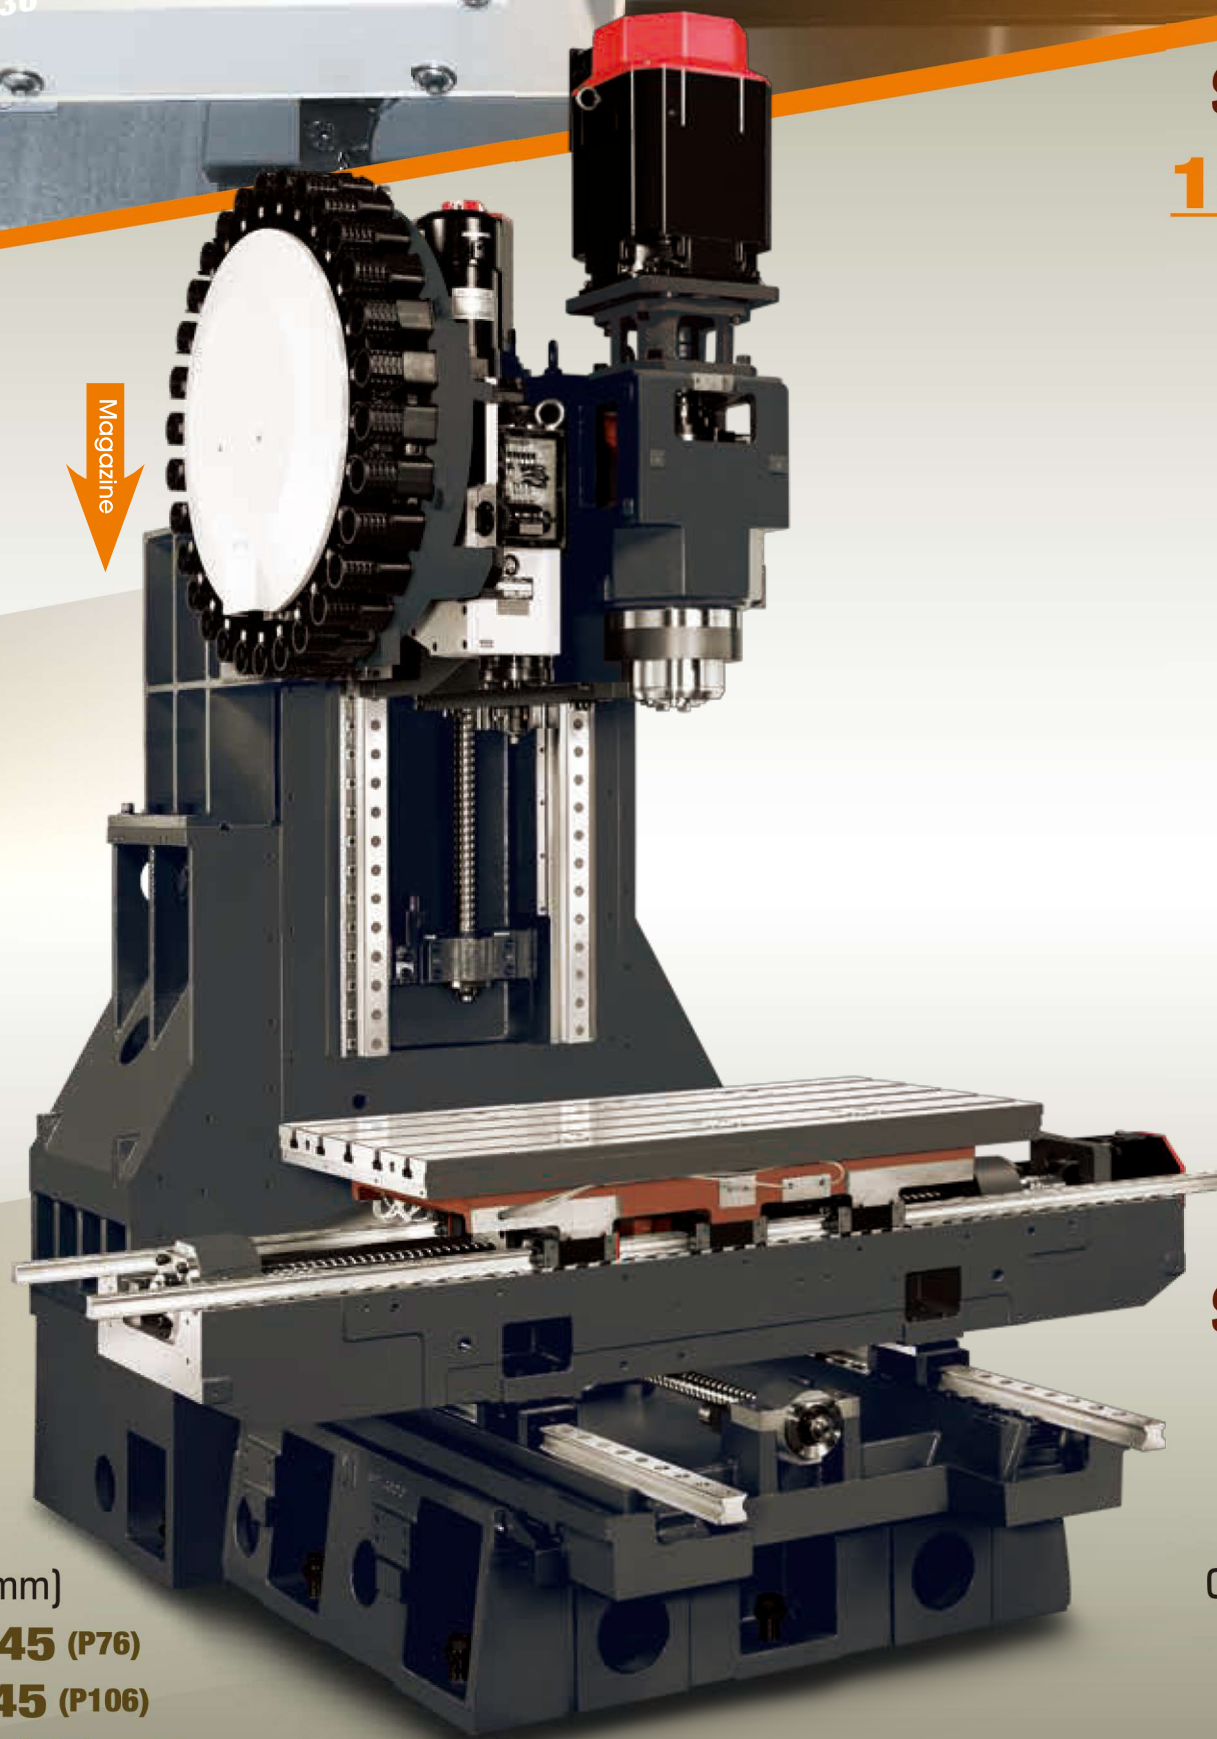


Spindle BBT-40

18.5 kW* (S3-25%)


12000 rpm
[* opt. 15 kW with CTS]



Fanuc α i12/12000 (std. without CTS)

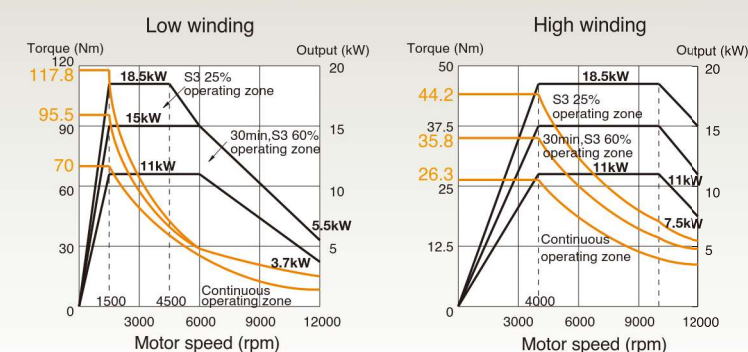

Fanuc α iT8/12000 (opt. with CTS)

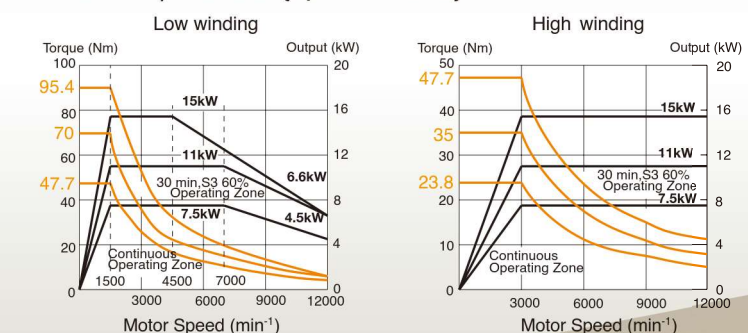

Structure



Certificated Casting

GA350



Wide column

1166 mm (P76)
1270 mm (P106/P136)

Vcenter-P series



Standard Accessories


New Fanuc Oi-MF Plus (type-1) control includes:

- 10.4" screen
- AICC-2 (200 blocks)
- QWERTY keyboard
- 2GB CF card
- Manual Guide i (MGI)
- VSS Macros (Victor's GUI)

Victor Taichung's GUI "VSS macros"



Tool breakage detection



Alarm display with diagnosis



Tool management



Tool management


Spindle oil cooler



Arm type ATC + Auto door for magazine + Coolant ring + LED lights



Heat exchanger + Enclosed rear guarding

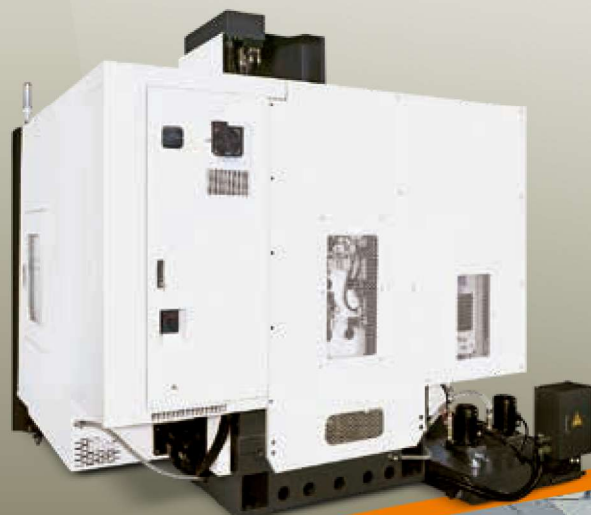

Bottom guarding flush (Vc-P106/P136) + screw chip remover (4 screws for P136)



15" screen (opt.)

Linear scales



Chip conveyor



CTS (Coolants Thru. Spindle)



Auto tool length measurement



Auto part measuring



4th axis interface for rotary table




Vcenter-P76APC

Auto Pallet Changer


- APC mechanism seated on ground for high rigidity**
 - Pallet dimension 720mm x 400mm**
 - Pallet exchange time: 15 seconds (incl. air sealing detection time)**
 - Control panel at right side for easy operation**
 - Linear scales and 4th axis can be installed**
- 



Pallet dimension

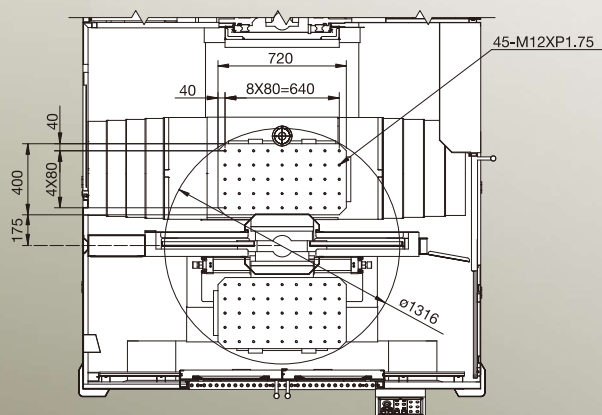

Machining range

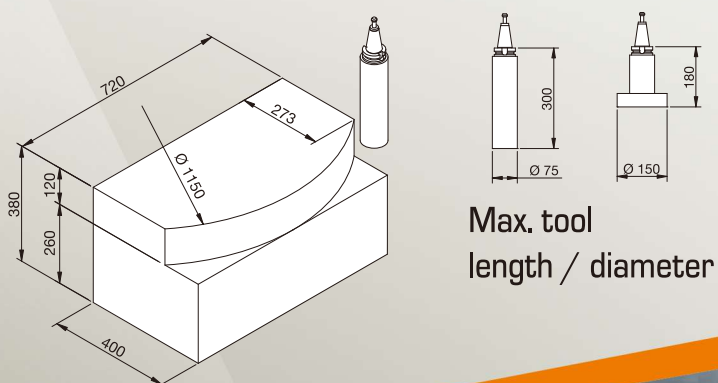


VICTOR Taichung's NC PACKAGE


Heidenhain TNC-620/640 controls

- Powerful dialog programming
- Fully alphanumeric keyboards
- Preview contouring 5000 blocks
- 15" screen
- HR-510 hand wheel


Spindle Output (Heidenhain)

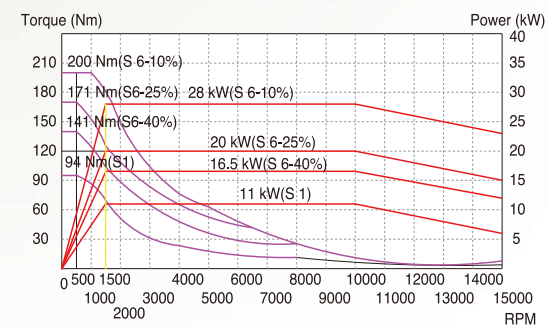

Siemens motor 1PH8131

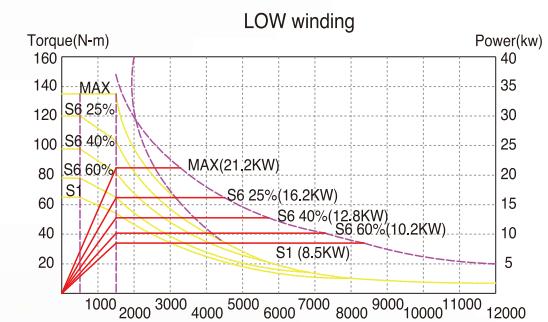

Siemens motor 1PH8107
(15000rpm spindle)

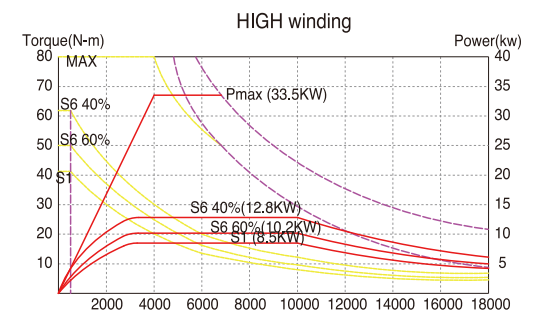

Control features for fast contour milling

Feature \ Controller	FANUC			HEIDENHAIN	
	0i-MF Plus (type 1)	0i-MF Plus (type 0)	31i-B Plus	TNC-620	TNC-640
Block addressing time	1 ms	0.4 ms	0.2 ms	1.5 ms	0.5 ms
Preview contouring (look ahead blocks)	200	200 (Opt. 400)	1000	5000	5000
Graphic display	10.4"	15" (Opt. 10.4")	15" (Opt. 19")	15"	15" (Opt. 19")
Data storage	5120m (2MB)	5120m (2MB)	10240m (4MB) Opt. 20480m (8MB)	Min. 2GB	Std. 21GB (by SSRD) Opt. 144GB (by HRD)
Memory extension	Std. (CF card, 2GB)	Std. (CF card, 2GB)	Std. (CF card, 2GB)	Opt. (by USB)	N.A.
DATA SERVER	Opt. (by CF Card)	Opt. (by CF Card)	Std.	Std	Std.
Ethernet link	Std.	Std.	Std.	Std.	Std.
Touch panel	N.A.	Incl.	Incl.	Opt.	Opt. (Std. for 19")
Conversational function	Manual guide I (MGI) + VSS macros	iHMI + MGI + VSS macros	iHMI + MGI + VSS macros	Std.	Std. + SmartNC
Data transfer interface	PCMCIA + USB	PCMCIA + USB	PCMCIA + USB	USB	USB

Machine Specification

Item		Unit	Vcenter-P76 Vcenter-P76APC	Vcenter-P106	Vcenter-P136
Travel	X axis travel	mm	760	1060	1360
	Y axis travel	mm	500	600	700
	Z axis travel	mm	460		
Distance	Spindle center to column	mm	510 (opt. 690)	560 (opt. 760)	700
	Spindle nose to table surface	mm	540	627	792
			565		
Table	Table work area	mm	120 ~ 630 (opt. 810)	150 ~ 710 (opt. 910)	100 ~ 800
			100 ~ 640		
			840 x 500	1120 x 520	1400 x 700
			720 x 400		
Table	Dimension of T-slot	mm	4 x 18 x 100	5 x 18 x 100	7 x 18 x 100
			45-M12 (80 x 80)		
	Max. table load	kg	500	600	1000
Spindle	Spindle taper		BBT-40	BBT-40	BBT-40
	Spindle motor - cont/ 60%/25% (Fanuc)	kW	11 / 15 / 18.5 (w/t CTS)	11 / 15 / 18.5 (w/t CTS)	11 / 15 / 18.5 (w/t CTS)
			7.5 / 11 / 15 (for CTS)	7.5 / 11 / 15 (for CTS)	7.5 / 11 / 15 (for CTS)
	Spindle motor - cont/ 40%/25%/10% (Heidenhain)	kW	11 / 16.5 / 20 / 28	11 / 16.5 / 20 / 28	11 / 16.5 / 20 / 28
	Spindle speed	rpm	12000 (opt. 15000)	12000 (opt. 15000)	12000 (opt. 15000)
Feed rate	Rapid feed rate - X/Y/Z (Fanuc)	m/min	48 / 48 / 32	48 / 48 / 32	32 / 32 / 32
	Rapid feed rate - X/Y/Z (Heidenhain)	m/min	48 / 48 / 32	48 / 48 / 32	36 / 36 / 36
	Axis acceleration - X/Y/Z	m/sec²	0.7G / 0.7G / 0.5G	0.7G / 0.7G / 0.5G	0.4G / 0.4G / 0.5G
	Axis feed motor - X/Y/Z (Fanuc)	kW	3 / 3 / 3	3 / 3 / 3	3 / 3 / 3
	Axis feed motor - X/Y/Z (Heidenhain)	kW	4.5 / 4.5 / 5.4	4.5 / 4.5 / 5.4	5.1 / 5.4 / 8.6
	Cutting feedrate by table	m/min	20	20	20
	X/Y/Z ballscrew (dia. x pitch)	mm	40 x P16 (X)	45 x P16 (X)	45 x P16 (X)
			40 x P16 (Y/Z)	40 x P16 (Y/Z)	45 x P16 (Y/Z)
	Linear guide width (X/Y/Z)	mm	30 / 35 / 45	35 / 45 / 45	45 / 35 (4 off) / 45
	Max. tool length	mm	300	300	300
Tools	Max. tool weight	kg	7	7	7
	Magazine capacity		30 (opt. 40)	30 (opt. 40)	30 (opt. 40)
	Max. tool diameter (without adjacent tools)	mm	75 (150)	75 (150)	75 (150)
	Tool exchange time	sec.	2.2 (T-T), 6.0 (C-C)	2.3 (T-T), 6.3 (C-C)	2.3 (T-T), 7.7 (C-C)
	Pull stud angle	deg.	15 (JIS 40P)	15 (JIS 40P)	15 (JIS 40P)
	Tool selection method		Random	Random	Random
Accuracy (ISO 230-2)	Positioning accuracy (bi-directional)	mm	0.010	0.010	0.010
	Repeatability	mm	0.007 (± 0.0035)	0.007 (± 0.0035)	0.007 (± 0.0035)
	Power requirement	KVA	23 (excl. CTS)	23 (excl. CTS)	23 (excl. CTS)
	Min/Max. air pressure	kg/cm²	5.5 ~ 6.5	5.5 ~ 6.5	5.5 ~ 6.5
	Coolant tank capacity	L.	260	270	350
Machine	Std. NC controller (Fanuc)		0i-MF Plus (10.4")	0i-MF Plus (10.4")	0i-MF Plus (10.4")
	Opt. NC controller (Heidenhain)		TNC-620 (15")	TNC-620 (15")	TNC-620 (15")
	Floor space requirement	mm	2750 x 2719	3363 x 2812	4293 x 2963
			2750 x 3227		
	Max. machine height	mm	2731	2841	3074
			2920		
	Machine weight	kg	5500	6450	8880
			6500		

Standard Accessories:

- Fully enclosed splash guard
- Fanuc Oi-MF Plus (10.4") control
- Spindle oil cooler
- Screw-type chip remover (left disposal)
- Bottom guarding flushing coolants (Vc-P106/P136)
- Rigid tapping
- Remote MPG
- Hand tools and toolbox
- T nuts for table slot
- 3-step warning light
- Auto power off
- Leveling pads

Optional Accessories:

- Air conditioner for electric cabinet
- Chip conveyor
- Coolant through spindle (CTS)
- 40 tool magazine
- Auto tool length measurement
- Auto part measuring
- Stop block for special tools
- 4th/5th axis interface
- Auto door
- Oil skimmer
- Air gun
- Coolant gun
- 15000 rpm spindle (DCS)
- Linear scales
- Rotary tables
- Higher column with extended Z-axis travel 760mm (for Vc-P106)
- Victor Spindle Compensator (TSC) for thermal displacement

VICTOR's FANUC Oi-MF Plus (Type 1)/31i-B Plus Control Specifications


ITEM	SPECIFICATION	DESCRIPTION
Controlled Axes		
1.	Controlled Axes	3 Axes (X, Y, Z)
2.	Simultaneous Controlled Axes	4 Axes
3.	Least Input Increment	0.001 mm / 0.0001 inch / 0.001 deg.
4.	Least Input Increment 1/10	0.0001 mm / 0.00001 inch / 0.0001 deg.
5.	Max. command value	± 99999.999 mm (± 9999.9999 in)
6.	Inch / Metric Conversion	Std. (G20/G21)
7.	Interlock	All Axes / Each Axis / Cutting Block Start
Operation		
1.	Automatic Operation	Std.
2.	MDI Operation	MDI B
3.	DNC Operation	Reader / Puncher Interface is Required
4.	DNC Operation with Memory Card	PCMCIA Card Attachment is Required
5.	Manual Handle Feed	1 Unit / Each Path
6.	Manual Handle Feed Rate	X1, X10, X100
Interpolation		
1.	Positioning	G00
2.	Exact Stop Mode	G61
3.	Exact Stop	G09
4.	Linear Interpolation	G01
5.	Circular Interpolation	G02, G03 (multi-quadrant is possible).
6.	Dwell	G04
7.	Helical interpolation	Std.
8.	Skip Function	G31
Feed		
1.	Rapid Traverse Rate	Std.
2.	Rapid Traverse Override	F0, 25%, 50%, 100%
3.	Feed Per Minute	G94 (mm/min)
4.	Tangential Speed Constant Control	Std.
5.	Cutting Feed rate Clamp	Std.
6.	Automatic Corner Deceleration	Std. (G64)
7.	Feed rate Override	0~200%
8.	Jog Override	0~100%
9.	Automatic Corner Override	G62.
10.	Feed Stop	Std.
11.	AI contour control (AICC, G05.1) (in total)	200 blocks (AICC-2)
12.	Look-ahead blocks expansion (in total)	1000 blocks (31i)
Program Input		
1.	EIA / ISO Automatic Recognition	Std.
2.	Label Skip	Std.
3.	Parity Check	Std.
4.	Control In / Out	Std.
5.	Optional Block Skip	1
6.	Max. Programmable Dimension	± 8-Digit
7.	Program Number	04-Digit
8.	Sequence Number	N5-Digit
9.	Absolute / Incremental Programming	G90/G91
10.	(Pocket Calculator Type) Decimal Point Programming	Std.
11.	Input Unit 10 Time Multiply	Std.
12.	Plane Selection	G17, G18, G19
13.	Rotary Axis Designation	Std.
14.	Rotary Axis Roll-Over Function	Std.
15.	Polar coordinate Command	G16.
16.	Coordinate System Setting	Std.
17.	Automatic Coordinate System Setting	Std.
18.	Workpiece Coordinate System	G52, G53, G54~G59
19.	Addition of Workpiece Coordinate System Pair	48 Pairs
20.	Manual Absolute On And Off	Std.
21.	Optional Chamfering/Corner R	Std.
22.	Programmable Data Input	G10
23.	Sub Program Call	4 (0i) or 10 (31i) folds nested
24.	Custom macro B	Std.
25.	Addition of Custom Macro Common Variables	#100~#199,#500~#999
26.	Interruption type custom macro	Std.
27.	Canned Cycles For Milling	G73/G74/G76, G80-G89, G98/ G99
28.	Small hole peck drilling cycle	G83
29.	Circular Interpolation by R Programming	Std.
30.	Program Format	FANUC std. format
31.	Program Stop / Program End	M00/M01/M02/M30
32.	Reset	Std.
33.	Scaling	G51
34.	Coordinate System Rotation	G68
35.	Programmable mirror image	G50.1
36.	Manual Guide I (MGI) conversational programming	Std.
37.	Optional block skip 9 blocks	Std.
38.	Quick program restart	Std.
39.	Jerk control	Std. (31i)
40.	NURBS interpolation	Std. (31i)

Auxiliary Spindle Speed Function		
1.	Auxiliary Function Lock	Std.
2.	High Speed M / S / T Interface	Std.
3.	Spindle Speed Function	Std.
4.	Spindle Override	50~200%
5.	1st Spindle Orientation	Std.
6.	M Code / S Code / T code Function	M3 / S5 / T2 digit
7.	Rigid tapping	Std.
Tool Function & Tool Compensation		
1.	Tool Function	T8 digit
2.	Tool Offset Pairs	± 6-digit, 400
3.	Tool Offset Memory C	STD (D/H codes are separated)
4.	Tool Length Compensation	G43-G44, G45-G48, G49
5.	Cutting Compensation C	Std.
Accuracy Compensation		
1.	Backlash Compensation	Rapid Traverse / Cutting Feed
2.	Stored Pitch Error Compensation	Std.
Edit Operation		
1.	Part Program Storage Length (in total)	5120m (2MB) (0i), 10240m (4MB) (31i)
2.	Number of Registered programs (in total)	1000
3.	Part Program Editing / Protect	Std.
4.	Background Editing	Std.
5.	Memory Card Editing (Max. 1000 programs,)	Std.
Setting and Display		
1.	Clock Function	Std.
2.	Current Position Display	Std.
3.	Program Display	Program name 31 characters
4.	Parameter Setting and Display	Std.
5.	Self Diagnosis Function	Std.
6.	Alarm Display / Operation History Display	Std.
7.	Alarm History Display	50
8.	Help Function	Std.
9.	Run Hour and Parts Count Display	Std.
10.	Actual Cutting Feedrate Display	Std.
11.	Display of Spindle Speed and T Code At All Screens	Std.
12.	Graphic Function	Std.
13.	Dynamic graphic display	Std. (in MGI)
14.	Data Protection Key	Std.
15.	Erase CRT Screen Display	Std.
16.	Machining Condition Selecting Screen	Std.
17.	Color LCD / MDI	10.4" (0i), 15" (31i)
Data Input / Output		
1.	Reader / Puncher Interface	RS-232 interface
2.	Memory Card Interface	Std.
3.	Embedded Ethernet (10Mbps)	Std.
4.	USB Device	Std.

OPTIONS

ITEM	SPECIFICATION	DESCRIPTION	
With hardware included		0i-MF Plus	31i-B Plus
1.	Data server (with PCB and CF card 1GB)	☐	Std. (2GB)
2.	15" LCD with Panel iH (iHMI) and touch screen - AI contour control 400 blocks	☐	Std.
3.	Part Program Storage Length 20480m (8MB in total)	N.A.	☐
4.	Ethernet/IP (to be linked to robot)	☐	☐
5.	PROFINET (to be linked to robot)	☐	☐
6.	CC-Link (to be linked to robot)	☐	☐
7.	Fast Ethernet (required for SCADA Web with additional RJ45 port)	☐	☐
8.	5-axis simultaneous control	N.A.	☐ (31i-B5 Plus)
Without hardware included			
9.	Tool load monitoring (with Victor own PLC)	☐	☐
10.	Tool retract and return (G10.6 with Victor own PLC)	☐	☐
11.	Addition of work-piece coordinate systems 300 sets	☐	☐
12.	Bi-directional Pitch Error Compensation	☐	☐
13.	Cylindrical interpolation (G7.1) (used on 4th axis) - by plane distance command	Std.	☐
14.	Exponential interpolation (G2.3)	N.A.	☐
15.	Conical/spiral interpolation	N.A.	☐
16.	Polar coordinate interpolation	N.A.	☐
17.	Floating reference position return	N.A.	☐
18.	Hypothetical axis interpolation (G07)	N.A.	☐


Tool Shank

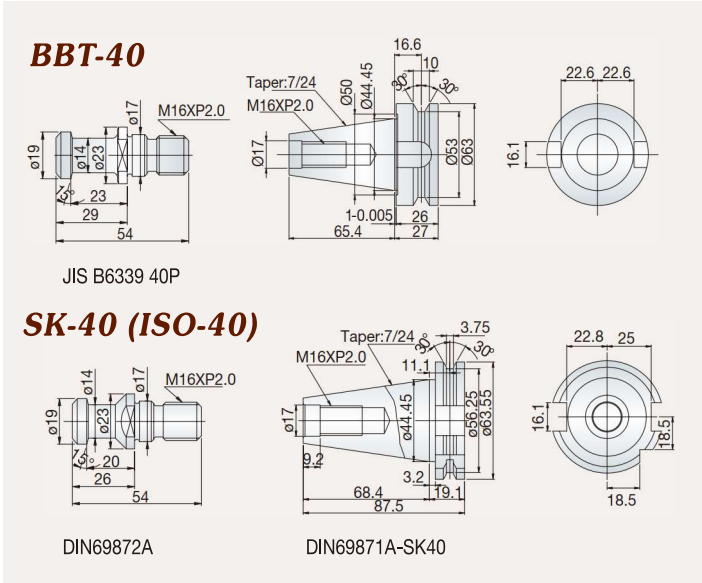


Machine Color Option



Machine Layout

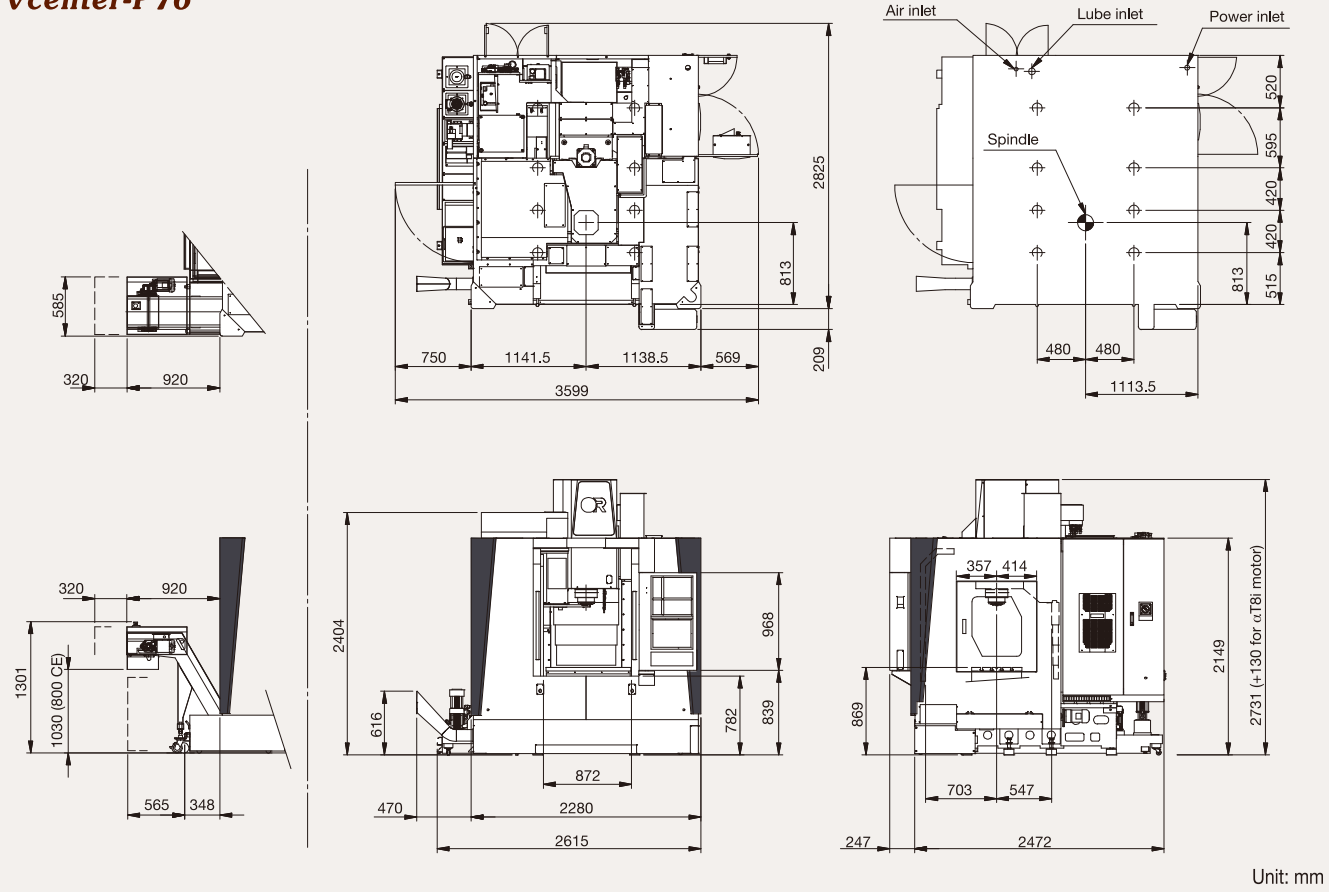
Vcenter-P76

Vcenter-P76APC

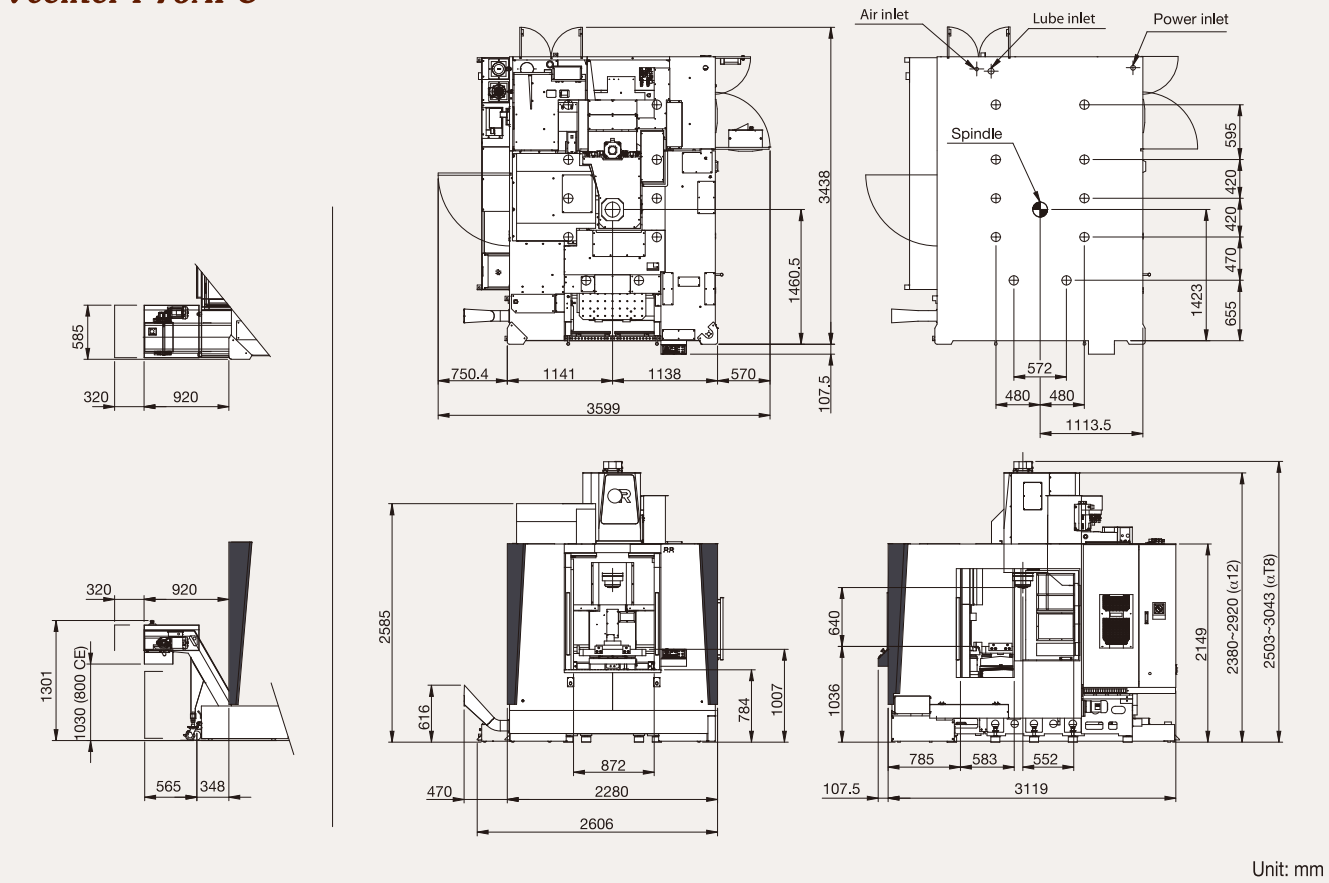


Machine Layout

Vcenter-P106

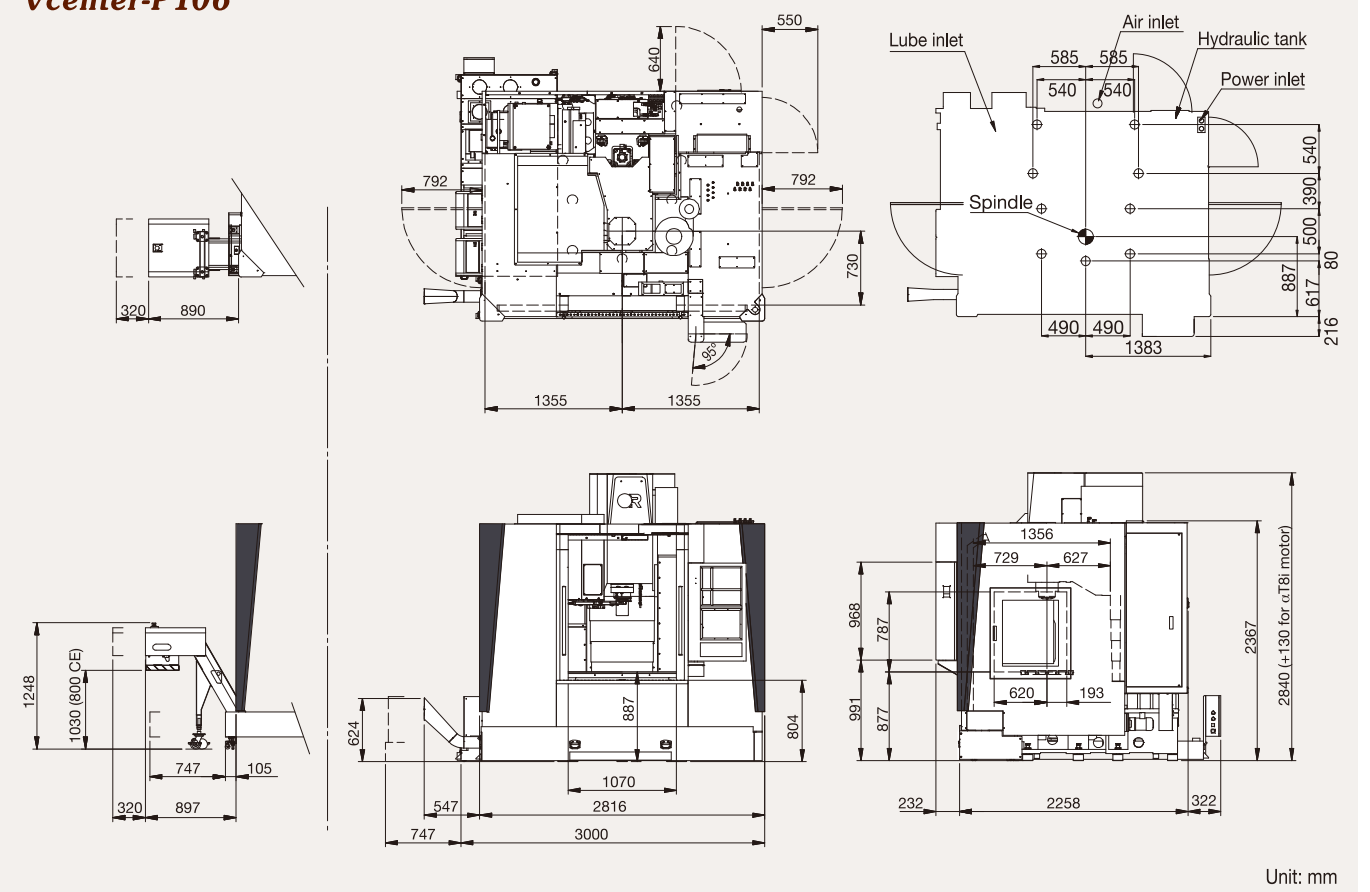

Vcenter-P136

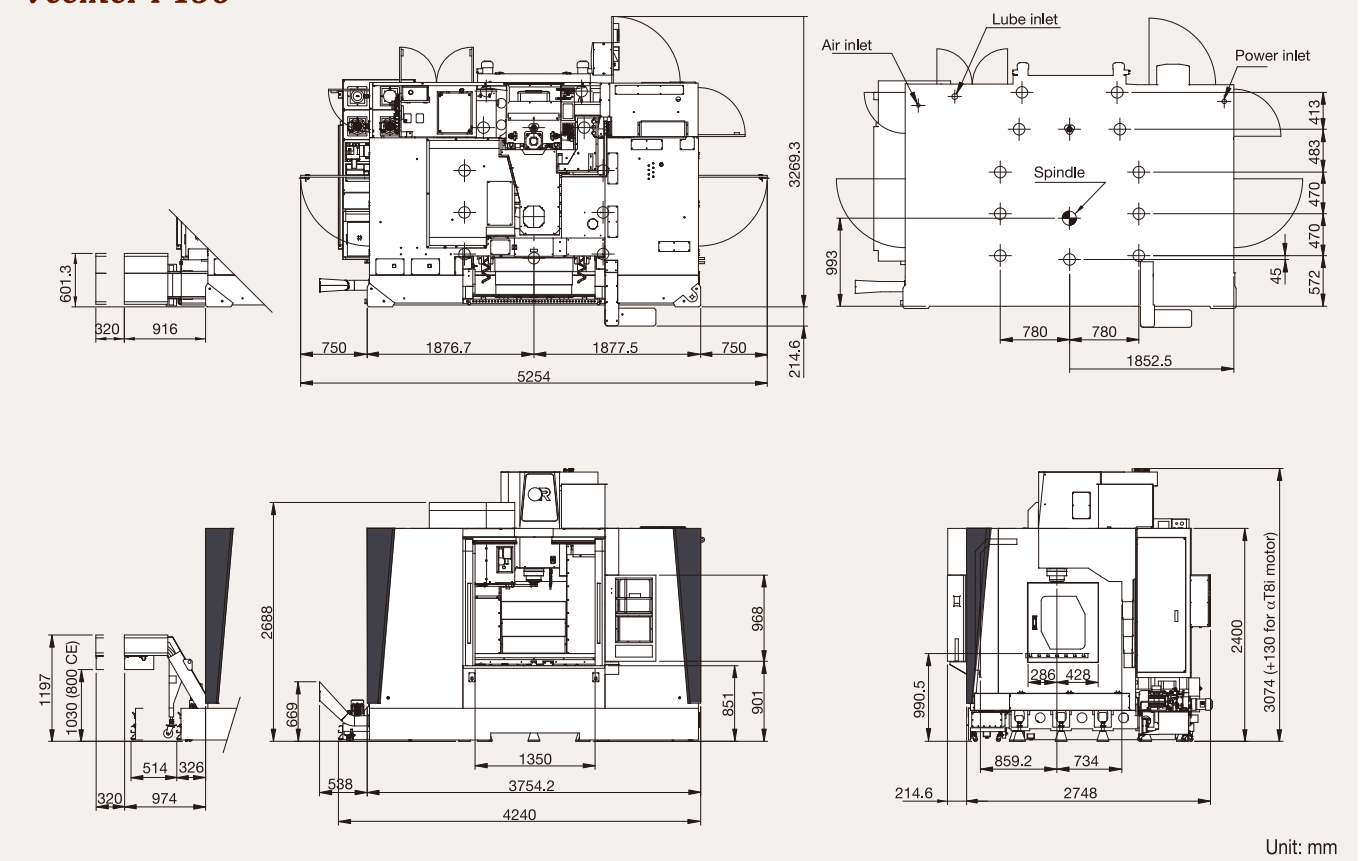



OR ONWARD RISE

To ensure the return on investment, Victor Taichung has invested considerably in setting up a distribution network in terms of global vision local touch for our sales and service supports worldwide. Besides the qualified exclusive agents around the world, Victor Taichung has 7 overseas subsidiaries to provide our customers efficient after-sales service and technical supports.



Vcenter-P136



OR VICTOR TAICHUNG profile:
Sales turnover: USD 140 mil's (in 2023)*
No. of employees: 735
*Exchange rate: 1 USD=30 TWD.



THE VICTOR-TAICHUNG COMPANIES

TAIWAN

<http://www.victortaichung.com>
E-mail :info@mail.or.com.tw
□ Victor Taichung Machinery Works Co., Ltd.
No. 1, Jingke Central 2nd Rd.,
Nantun Dist., Taichung 40852,
TAIWAN, R.O.C.
TEL : 886-4-23592101
FAX : 886-4-23593389

FRANCE

□ Victor France
TEL : 33-1-64772000
FAX : 33-1-64772063

GERMANY

□ Victor GmbH
TEL : 49-2261-478434
FAX : 49-2261-478327

SOUTH AFRICA

□ Victor Fortune (PTY) Ltd.
TEL : 27-11-3923800
FAX : 27-11-3923899

MALAYSIA

□ Victor Machinery (M) SDN. BHD.
TEL : 60-3-56337180
FAX : 60-3-56337191

THAILAND

□ Victor CNC (Thailand) Co., Ltd.
TEL : 66-2-9263735
FAX : 66-2-9032373

INDONESIA

□ PT. Victor Machinery Indonesia
TEL : +62-21-88958504
FAX : +62-21-88958513

USA

□ Fortune International Inc.
TEL : 1-732-2140700
FAX : 1-732-2140701

CHINA

□ Victor Taichung
Machinery (Shanghai)
TEL : 86-21-59768018
FAX : 86-21-59768009



HTL



VTL



VMC



HMC



XMT



PIM